

Res-Q Man® Positioning System

- Can be activated by one person for positioning work.
- Great for work where soft bases are a problem, e.g. grain elevators, over water, or in aggregate silos.
- Can be used with a harness, seat, or stretcher.
- Excellent for work where movement up and down a structure is required, e.g. ship building, window washing, aerial lifts, and cable car rescue.
- Works well for confined space applications and bridge inspection.



ITEM#	Description
FP-FP5/6400K/200	Res-Q Man® positioning system with carabiner, ascender handle, and 200' of kernmantle rope



Rope Terminator Plate

Used to terminate a 5/8" (16 mm) diameter, 3 strand, double braid, or kernmantle rope lifeline. The plate provides a quick, reusable field termination that eliminates the need for knots and factory terminations.

Note: Requires connecting hardware.



ITEM#	Description
FP-SRIW1000	5/8" Termination plate

Anchorage Slings

FP-SFP22N002B



FP-SFP2267406



ITEM#	Description
FP-SFP22N002B	Anchorage choker sling, size small
FP-SFP2267406	Suretyman anchorage sling

Anchorage Cable Sling

- Standard lengths of 2', 4', and 6', custom lengths also available.
- Vinyl coated.
- 1/4" Galvanized cable.



ITEM#	Description
FP-SFP3267502	Anchorage cable sling, 2' length
FP-SFP3267504	Anchorage cable sling, 4' length
FP-SFP3267506	Anchorage cable sling, 8' length

Bolt D-Ring with Hole


- Permanent anchorage connector.
- Attaches to bottom of I-beam flange, user supplies bolt.
- Designed for horizontal installation.



ITEM#	Description
FP-10003213	Bolt D-ring with hole

Permanent Roof Anchors

Available in five sizes and fits all pitches of roof trusses or rafters. Installs easily without the use of special tools and includes UV resistant neoprene flashing to help prevent roof leakage. The low profile, brown color of the exposed portion of the roof anchor makes it unobtrusive on a finished roof.

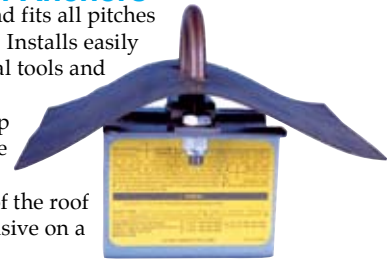

- All steel construction to last the life of the roof with minimal maintenance.
- Can be used for Dyna-Line® and Sure-Line® temporary horizontal lifelines.
- Available sizes: 2" x 4", 2" x 6", 2" x 8", 2" x 10", 2" x 12".
- Meets applicable OSHA and ANSI standards.



ITEM#	Permanent Roof Anchors
FP-10016468	For use with 2" x 4" trusses/ beams
FP-10017593	For use with 2" x 6" trusses/ beams
FP-10017594	For use with 2" x 8" trusses/ beams
FP-10017595	For use with 2" x 10" trusses/ beams
FP-10017596	For use with 2" x 12" trusses/ beams



Wire Clasp

Easy and simple installation.



ITEM#	Description
FP-10003208	Medium wire clasp, diameter 4-1/8"

More

Fall protection

products available

Call for details

