

Eye and Eye/ Face Washes

- Heavy gauge aluminum, wall-mount bracket.
- Tailpiece.
- Wall mount.
- Hand operation (push handle).
- Bradtect™ coated galvanized steel pipe.
- 1/2" water supply.
- 1.25" waste.
- All eye and eye/ face washes comply with ANSI Z358.1-2004.



ITEM#	Description
ESEW-S19-220	Eyewash, plastic bowl (image A)
ESEW-S19-220B	Eyewash, stainless steel bowl
ESEW-S19-220FW	Eye/ face wash, plastic bowl
ESEW-S19-220T	Eye/ face wash, stainless steel bowl (image B)
ESEW-S19-220DCFW	Eye/ face wash, stainless steel bowl, with dust cover

Swing-Activated Eye and Eye/ Face Washes


- Swing down or swing over activation.
- Conveniently store away from work area when not in use.
- Deck/ counter mount.
- Chrome-plated brass pipe.
- 1/2" water supply.
- Comply with ANSI Z358.1-2004.



ITEM#	Description
ESEW-S19-270C	Eyewash, swing over activation (image A)
ESEW-S19-270E	Eye/ face wash, swing over activation (image B)
ESEW-S19-270HD	Eyewash, swing down activation
ESEW-S19-270HW	Eyewash, swing down activation
ESEW-S19-270JD	Eye/ face wash, swing down activation
ESEW-S19-270JW	Eye/ face wash, swing down activation

Pedestal-Mount Eye and Eye/Face Washes

- Hand operation (push handle).
- Bradtect™ coated galvanized steel pipe.
- 1/2" water supply.
- 1.25" waste.
- Comply with ANSI Z358.1-2004.

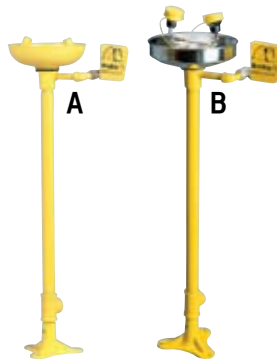

ITEM#	Description
ESEW-S19-210	Eye wash, plastic (image A)
ESEW-S19-210B	Eye wash, stainless steel
ESEW-S19-210FW	Eye/ face wash, plastic
ESEW-S19-210Y	Eye/ face wash, stainless steel (image B)

Plastic Retrofit Dust Cover

For use with any Bradley plastic eyewash bowl.



ITEM#	Description
ESEW-S45-1964	Retrofit Plastic Dust Cover

Faucet-Mount Eyewash

- One-step activation.
- Certified as an ANSI compliant eyewash.
- Adapters include: 55/64" x 27" thread (female), 13/16" x 27" thread (male), and 15/16" x 27" thread (male). Additional adapters available.



ITEM#	Description
ESEW-S19-200B	Faucet-Mount

On-Site® Gravity-Fed Eyewash and Transport Cart

- Transparent tank allows solution level to be checked easily.
- Hinged eyewash tray activates in one quick motion.
- Stainless steel clamps secure tank during transport.
- Vandals-resistant unit: foreign objects cannot be introduced into tank because all openings are sealed once the tank is installed.
- High visibility yellow.
- Molded pedestal and tank.
- Seven gallon tank is one of the lightest portable eyewashes on the market.
- Complies with ANSI z358.1-2004.



ESEW-S19-921



ESEW-S19-399

ESEW-S19-921	Gravity-fed eyewash Includes: <ul style="list-style-type: none"> • Wall bracket (can also deck mount). • ESEW-S19-899 preservative kit.
--------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------



ESEW-S19-921H	Gravity-fed eyewash with heater jacket <ul style="list-style-type: none"> • Protects against freezing down to -20 °F (-29 °C). • Insulated, 121 watt heater. • Secondary thermostat prevents overheating if primary thermostat fails. • Requires 120 volt AC line. • All UL listed components.
---------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

ESEW-S19-865	Water preservative <ul style="list-style-type: none"> • Prevents bacteria, fungi, and algae growth for up to four months. 8 oz bottle.
--------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------

ESEW-S19-899	Refill kit <ul style="list-style-type: none"> • Includes: replacement cap, three liners, one 8 oz bottle of preservative, inspection tag.
--------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------

ESEW-S19-399	Waste cart <ul style="list-style-type: none"> • Captures used fluid, 56 gallon capacity. • Tapered sump, easy to drain.
--------------	--------------------------------------------------------------------------------------------------------------------------------------------------------



Drench Hoses

- ABS plastic eye/ face wash sprayheads.
- 8' drench hose standard.
- Squeeze activated handle.
- Locking clip; continuous water flow once activated.
- Deck-mounted models include deck-mounting hardware.
- Wall-mounted models include wall-mounting hardware.



ESEW-S19-460

ESEW-S19-460EFW



ITEM#	Description
ESEW-S19-460	Single head, vertical sprayhead, deck mounted
ESEW-S19-460EFW	Dual head, vertical sprayhead, deck mounted, ANSI compliant eye/ face wash
ESEW-S19-430A	Single head, vertical sprayhead, wall mounted
ESEW-S19-430EFW	Dual head, vertical sprayhead, wall mounted

Portable Pressurized Eyewashes



ESEW-S19-690



ESEW-S19-690H

Each tank includes:

- Built-in carrying handles.
- Tire filler valve with 0-100 PSI air gauge.
- Chrome-plated brass eyewash.
- 8' drench hose.
- Pressure relief valve to prevent over-pressurization.

Heated units:

- Maintain average water temperature at 75 °F (24 °C).
- Secondary thermostat prevents overheating.
- Plug into 120 volt AC line, GFCI recommended.
- UL-listed components.

ITEM#	Description
ESEW-S19-690	Eyewash with drench hose, 10 gallon capacity, 15 minute eyewash flow, 3.5 minute drench hose flow, ANSI Z358.1-2004 compliant eyewash
ESEW-S19-690H	Eyewash only, 510 watt heater, 10 gallon capacity, 15 minute eyewash flow, ANSI Z358.1-2004 compliant eyewash
ESEW-S19-788	Eyewash and drench hose, 15 gallon capacity, 22 minute eyewash flow, 5 minute drench hose flow, ANSI Z358.1-2004 compliant eyewash
ESEW-S19-788H	Eyewash only, 510 watt heater, 15 gallon capacity, 22 minute eyewash flow, ANSI Z358.1-2004 compliant eyewash
ESEW-S19-690A	Stainless steel transport cart; for all portable, pressurized eyewashes



Combination Showers / Eyewashes

- Stainless steel pull rod with triangular handle.
- Stay-open ball valve; 1/2" eyewash valve, 1" shower valve.
- Bradtect™ coated, galvanized steel pipe; 1.25" water supply, 1.25" waste.
- 10" diameter bowls.
- Comply with ANSI Z358.1-2004.



ITEM#	Description
ESEW-S19-310	Plastic showerhead; plastic, impact-resistant bowl; chrome-plated, brass eyewash
ESEW-S19-310UU	Stainless steel showerhead and bowl; chrome-plated, brass eyewash; hand/ foot operation
ESEW-S19-310LL	Plastic showerhead; stainless steel bowl; hand/ foot operation
ESEW-S19-310FW	Plastic showerhead and bowl, ABS plastic perforated disc for eye/ face wash sprayhead
ESEW-S19-310AC	Plastic showerhead; stainless steel bowl; hand/ foot operation; ABS plastic perforated disc for eye/ face wash sprayhead



Barrier-Free Shower / Eyewash with Face Spray Ring

- Features full body rinse, eyewash rinse, and face spray ring in bowl to rinse entire face.
- Stainless steel pull rod with triangular handle.
- Stay-open ball valve; 1/2" eyewash valve, 1" shower valve.
- Bradtect™ coated, galvanized steel pipe; 1.25" water supply, 1.25" waste.
- 10" diameter, stainless steel bowl.
- Plastic showerhead.
- Chrome-plated face spray ring.
- Complies with ANSI Z358.1-2004.



ITEM#	Description
ESEW-S19-310BF	Barrier-free, combination shower/ eyewash with face spray ring




A

B

Horizontal and Vertical Supply Drench Showers

- Stainless steel pull rod with triangular handle.
- Stay-open ball valve.
- Bradtect™ coated, galvanized steel pipe.
- 1" water supply.
- Comply with ANSI Z358.1-2004.



ITEM#	Horizontal Drench Showers
ESEW-S19-120	Plastic showerhead
ESEW-S19-120A	Stainless steel showerhead (image A)
ESEW-S19-120FM	Stainless steel showerhead, flush mounted, integral flange mount (image B)

ITEM#	Vertical Drench Showers
ESEW-S19-130	Plastic showerhead
ESEW-S19-130A	Stainless steel showerhead

Thermostatic Mixing Valves

- Reliable, liquid-filled thermostat features adjustable set point with-in temperature range and accurate temperature control within ± 3 °F.
- Dial thermometer.
- Checkstops on inlets.
- Built-in cold water bypass.
- Positive shut off of hot supply when cold supply is lost.
- Dirt and lime resistant.
- Factory assembled and tested.
- Universal mounting capability.



ITEM#	Description
ESEW-S19-2000	8 GPM @ 30 PSI (shown); accommodates up to three eyewashes or one eye/ face wash
ESEW-S19-2100	36 GPM @ 30 PSI; accommodates one combination shower with eyewash or multiple eyewashes
ESEW-S19-2200	67 GPM @ 30 PSI; accommodates up to two combination showers with eyewashes or multiple eyewashes

Heat Trace Shower with Eye/ Face Wash

- Stainless steel pull rod with triangular handle.
- Chrome-plated, brass, stay-open ball valve; 1/2" eyewash valve, 1" shower valve.
- 1.25" galvanized steel pipe.
- Complies with ANSI Z358.1-2004.
- 10" diameter, impact-resistant showerhead.
- Electric heat trace cable. Thermal rating: 5 watts per foot. Self-regulated to 50 °F (10 °C). Protects against overheating and cold spots.
- 3/4" polyethylene pipe insulation.
- ABS plastic outer shell is easy to maintain. Has four easy to remove sections. Sealed with vinyl trim.
- Freeze protection valve opens at 35 °F (2 °C) internal water temperature to prevent freezing. Maximum pressure rating: 200 PSI.
- Thermostat opens at 64 °F (18 °C), closes at 54 °F (12 °C).
- Four hub, aluminum junction box accepts 3/4" conduit.
- Version D2, Class 1, Division 2 – groups B, C, D.




ITEM#	Description	Bradley
ESEW-S19-300	Heat trace shower with eye/ face wash; 120 volts	

Corrosion-Resistant Combination Units



ITEM#	PVC Shower and Eye/ Face Wash
ESEW-S19-310PVC	Plastic showerhead and bowl, 2" schedule 80 PVC pipe, all metal components are stainless steel, eye/ face sprayheads
ITEM#	Stainless Steel Shower and Eye/ Face Wash
ESEW-S19-310FSS	All stainless steel fixture, hand/ foot operation, eyewash only

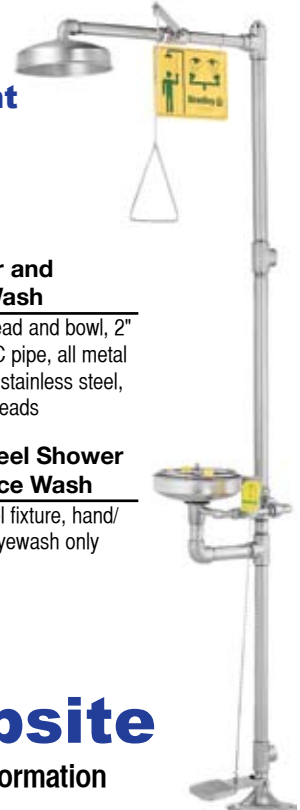

Visit
our
website

For new product information

